# WOODS BATWING CUTTERS



# WOODS

## **Batwing® Cutters**

## Table of Contents

BW12	4
BW10.50 / BW15.50	5
BW10.60 / BW15.60	. <b>6-7</b>
BW10.70 / BW15.70	. <b>6-7</b>
BEST BATWING EVER	. 8-9
BW240X / BW240XHD	10
RW1620X / RW2400X	11



Since 1946, we've been manufacturing in Oregon, Illinois, and supporting the growth of American jobs.

# **GENUINE PARTS**

Maintain the quality and performance of your Woods equipment with Woods genuine replacement parts, paint, and lubricants. Available from your authorized Woods dealer.

### **Find a Woods Dealer**

Woods equipment is distributed through a network of authorized dealers. To find your nearest store visit us at woodsequipment.com or call 800-319-6637.





800-319-6637 | woodsequipment.com









# WOODS







### **Model**

**BW12** 12-foot Dual-wing Cutter for compact/utility tractors

Requiring a minimum of 35 hp, the BW12 gives you Woods quality and performance in a sleek, round-front design and our industry-leading sloped deck.

- Total weight 2,450 lbs with 750 lb tongue weight, ideal for use on lower horsepower compact and utility tractors.
- Twelve gauge, high-strength steel and smooth, sloped deck provide durability for long life.
- Fully baffled deck, ensures better distribution of cut material, and the performance you expect.
- Six-year gearbox warranty including seals, for confidence in your purchase decision.
- Standard chain shielding for added safety and peace of mind.
- Retail financing available to qualified buyers.





NOTE: All Batwing® models pass all applicable safety standards for thrown object without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that standard chain shielding be used for extra protection.

## TRACTOR PTO HP RANGE: 45 - 200 HP


### Model

BW10.50/BW15.50 | 15-foot flex-wing rotary cutter

The BW15.50 is ideal for cutting tall grasses and saplings up to 2 ½ inches in diameter.

Here are just a few features exclusive to Woods that rotary cutter users like you told us were important in our 15-foot series.

- New patent-pending driveline lift assistance system makes it easy to hook up. Standard on all models.
- Rounded wings easily maneuver around obstacles and slice through tall brush while the curved leading edge shrugs off impact.
- New gearbox seal technology reduces leaks and downtime and is backed by our six-year gearbox warranty, which includes the seals.
- A steel tube around the perimeter absorbs shock and creates a stronger, longer-lasting machine.
- Chain shielding is integrated with the frame to prevent damage.



Designed with input from users like you, the BW15.50, BW15.60, BW15.70, and their one-winged models, set a new industry standard for durability, reliability, performance and ease. We think you'll agree that it's the best Batwing ever.

SPECIFICATIONS		
MODEL	BW10.50* / BW15.50	
Tractor PTO HP	45-200	
Cutting Height	2" - 15"	
Cut Capacity (inches)	2.5" dia	
Cutting Width (inches)	126" / 180"	
Blade Tip Speed	15,000 fpm at 540 rpm 16,000 fpm at 1000 rpm	
Weight	4,040 lbs / 4,340 lbs	
Tongue Weight	1,200 lbs	
Center Deck / Wing Deck	10 gauge	
Side Skirt Thickness	1/4"	
Side Skirt Depth	13"	
Transport Width	96"	
Stump Jumper	round	
Flex	90° up / 22° down	
Driveline Rating	CAT 6 CV main CAT 4 wing	
Splitter Gearbox Rating	210 hp	
Wings Gearbox Rating	200 hp	
Output Shaft Size	2" dia	
Gearbox Warranty	6 years	
Options	double row chain shielding     dual wheels     LED lights	

<sup>\*</sup>Single-wing

**BW15.50**Shown with standard chain shielding



## TRACTOR PTO HP RANGE: 55 - 275 HP

### **Models**

BW10.60/BW15.60 15-foot flex-wing rotary cutter

The BW15.60 easily powers through tall brush and trees up to 4 inches in diameter.

## TRACTOR PTO HP RANGE: 65 - 300 HP

### **Models**

BW10.70/BW15.70 15-foot flex-wing rotary cutter

The rugged BW15.70 can tame the harshest conditions – heavy brush and trees up to 4.5 inches in diameter. Ideal for professional and contract cutting.



### The new customer-designed 15-foot Batwing


SPECIFICATIONS			
MODEL	BW10.60* / BW15.60	BW10.70* / BW15.70	
Tractor PTO HP	55-275	65-300	
Cutting Height	2" -	15"	
Cutting Capacity (inches)	4" dia	4.5" dia	
Cutting Width (inches)	126" -	126" - 180"	
Blade Tip Speed	15,700 fpm at 540 rpm 16,000 fpm at 1000 rpm		
Weight	4,400 lbs / 4,600 lbs	5,290 lbs / 5,500 lbs	
Tongue Weight	1,350 lbs	1,490 lbs	
Center Deck / Wing Deck	7 gauge	1/4"	
Side Skirt Thickness	1/4"		
Side Skirt Depth	13"		
Transport Width	96"		
Stump Jumper	round		
Flex	90° up / 22° down		
Driveline Rating	CAT 6 CV main CAT 4 wing	CAT 6 CV main CAT 5 wing	
Splitter Gearbox Rating	275 hp		
Wings Gearbox Rating	225 hp		
Output Shaft Size	3" dia		
Gearbox Warranty	6 years		
Options	double row chain shielding     dual wheels     LED lights     shredding kit     deck ring     spring axle     full walking tandem axles		

<sup>\*</sup>Single-wing

- Rounded wings easily maneuver around obstacles and slice through tall brush while the curved leading edge shrugs off impact.
- New gearbox seal technology reduces leaks and downtime and is backed by our six-year gearbox warranty, which includes the seals.
- A steel tube around the perimeter absorbs shock and creates a stronger, longer-lasting machine.
- Chain shielding is integrated with the frame to prevent damage.
- Greaseable Quick-Change blade pins are easy to remove.

### Plus,

- Beefy, heavy-duty skid shoes prevent gouging and protect the deck.
- Strategically placed, welded baffles cut and distribute debris evenly.
- Center and wing decks feature high-strength 7 gauge steel (.60) or .26 inch thick steel (.70) for added durability.
- The side skirt is 13 inches deep and made of .25 inch thick steel for greater material capacity and the strength to manage it.
- For added toughness in extreme conditions, the .60 and .70 models have a 3-inch gearbox output shaft and optional deck ring.
- Other options include LED lights, double row chain shielding, dual wheels, and for the .60 and .70 models, a shredding kit for added versatility.

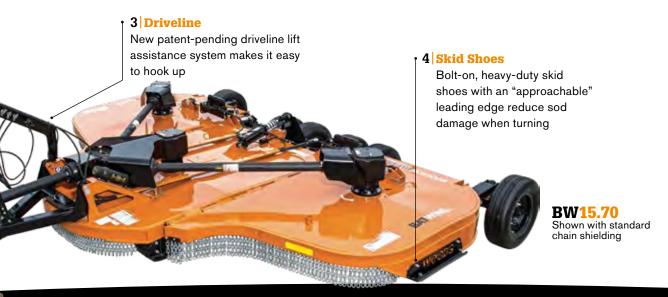

# WOODS

### **Batwing** Cutters

# THE BEST BATWING. YOU EVER DESIGNED.

You told us what you wanted in a rotary cutter and we delivered. It's more reliable, more durable, easier to use, easier to maintain and built to perform better. A variety of Woods-exclusive features make it outstanding in its field.



"I WANT A QUICK AND EASY TRACTOR HOOK-UP"

Steve McCullough, Watseka, Illinois Third Generation Family-owned Dealership and Batwing® Designer



 New patent-pending driveline lift assistance system makes it easy to hook up - and is standard on all models.





## "I WANT A MACHINE THAT WILL LAST"

### **DURABILITY**

- 1 Steel Tube Frame Absorbs Shock
- (2) Integrated Chain Shielding Prevents Damage
- 3 Heavy-Duty Skid Shoes

### RELIABILITY

 New, advanced gearbox seal technology, designed for harsh conditions, reduces leaks and downtime and is backed by our six-year gearbox warranty which includes the seals.

"I WANT TO CUT MORE AND MAINTAIN LESS"

**Ben Faivre, Polo, Illinois** Farmer and Batwing® Designer



### **EASY MAINTENANCE**

- (1) Industry Leading Smooth, Sloped Deck
- (2) Raised Components and Protected Hoses
- (3) Hinged, Easy-open Metal Shields
- 4 Easy-to-reach Grease Fittings
- (5) Greasable Quick-Change Blade Pins







# I WANT TO GET RID OF DEBRIS COLLECTING ON THE DECK !!

Shawn Schaaf, Rock City, Illinois



### "KEEP THE GREAT CUT QUALITY AND HELP ME MOW CLOSER TO TREES AND POLES"

### **PERFORMANCE**

- (1) Rounded Wings
- (2) Curved Leading Edge
- (3) Optional Shredding Kit Adds Two Blades
- (4) Calculated Positioning of Welded Baffles









## **Batwing® Cutters**

### 1 Greasable Pivot Pins

Greasable pivot points are located on turnbuckle and axle arms to increase durability and reduce wear

SPECIFICATIONS		20-FOOT BATWING
MODEL	BW240X	BW240XHD
Tractor PTO HP	70-200 hp	70-300 hp
Cutting Height	2" - 15"	
Cut Capacity (inches)	2"	3"
Cutting Width (inches)	24	0"
Blade Tip Speed	15,450 fpm at 540 rpm 16,300 fpm at 1000 rpm	
Weight	6,510 lbs	6,600 lbs
Tongue Weight	1,950 lbs	1,980 lbs
Center Deck / Wing Deck	10 gauge	
Side Skirt Thickness	1/4"	
Side Skirt Depth	13.25"	
Transport Width	123"	
Stump Jumper	Round	
Flex	90° up / 22° down	
Driveline Rating	CAT 6 CV main CAT 4 wing	
Splitter Gearbox Rating	250	) hp
Wings Gearbox Rating	120 hp	205 hp
Output Shaft Size	2"	2.38"
Gearbox Warranty	6 years	
Options	double row chain shielding     dual wheels     LED lights     full walking tandem axles	double row chain shielding     dual wheels     LED lights     full walking tandem axles     shredding kit



- Main driveline: Cat 6 CV
- Cuts brush up to 2 inches in diameter
- Walking tandem axle available

# TRACTOR PTO HP RANGE: **70 - 300 HP**

**BW240XHD** 20-foot Dual-wing Cutter

- Maintain driveline: Cat 6 CV
- Cuts brush up to 3 inches in diameter
- Side frame depth of 13.25 inches the deepest in the industry
- Optional shredding kit



## TRACTOR PTO HP RANGE: **70 - 300 HP**

### Models

**BW1620X** | 13.5-foot Single-wing Cutter (162-inch cutting swath) **BW2400X** | 20-foot Dual-wing Cutter (240-inch cutting swath)

- Main driveline: Cat 6 CV
- Deck plate has two layers of .135" plate
- Cuts brush up to 4 inches in diameter
- Side frame depth of 12.5 inches
- Optional dual tires available for wings
- Optional shredder kit or optional
- Optional blade ring
- Six-year gearbox limited warranty



### 3 Quick-change Blade System

Woods' exclusive Quick-Change blade system allows for easy changing of blades from the top of the deck

ODEOUELO ATIONO	00 5007	DATIVINO
SPECIFICATIONS	20-FOOT BATWING	
MODEL	BW1620X*	BW2400X
Tractor PTO HP	70-300 hp	
Cutting Height	2" - 15"	
Cut Capacity (inches)	4"	
Cutting Width	162"	240"
Blade Tip Speed	15,450 fpm at 540 rpm 16,300 fpm at 1000 rpm	15,450 fpm at 540 rpm 16,650 fpm at 1000 rpm
Weight	8,500 lbs	7,740 lbs
Tongue Weight	2,250 lbs	2,320 lbs
Center Deck / Wing Deck	10 gauge double	
Side Skirt Thickness	1/4"	
Side Skirt Depth	13.25"	12.50"
Transport Width	123"	100" / 123"
Stump Jumper	Round	
Flex	90° up / 22° down	
Driveline Rating	CAT 6 CV main CAT 5 wing	
Splitter Gearbox Rating	250 hp	
Wing Gearbox Rating	210 hp	
Output Shaft Size	2.38"	
Gearbox Warranty	6 years	
Options	double row chain shielding     dual wheels     LED lights     full walking tandem axles     shredding kit     deck rings	double row chain shielding     dual wheels     LED lights     full walking tandem axles     shredding kit     deck rings

^Sina	le-wing
Oning	ic willing

ne of he dustry	<b>BW240XHD</b> Shown with standard chain shielding
Features a double deck, built extra heavy to handle a host of rugged applications.	



**WOODS**® | A Blount International Brand 2606 South Illinois Route 2, Oregon, Illinois 61061 tel 800-319-6637 woodsequipment.com



Warning! Some images may show safety shields removed to provide a better view. Equipment should never be operated with any safety shield removed. Some machines in this brochure may be shown with optional equipment. Always operate machines in accordance with supplied operator's manuals. ©2018 Woods Equipment Company. All rights reserved. WOODS, and the Woods logo are trademarks of Woods Equipment Company. All other trademarks, trade names, or service marks not owned by Woods Equipment Company that appear in this brochure are the property of their respective companies or mark holders. Specifications subject to change without notice.