

# WOODS

## LANDSCAPE EQUIPMENT



A full line of tools to tackle  
a variety of yard, garden and landscape projects

**WOODS**

### Table of Contents

<b>Box Scrapers</b> .....	<b>4</b>	<b>Landscape Rakes</b> .....	<b>14</b>
From the reinforced steel A-frame to the tough, reversible cutting edge, our Woods and Gannon brand box scrapers deliver exceptional quality and versatility.		Woods landscape rakes are built for both tough clean-up jobs and fine raking.	
<b>Grading Scrapers</b> .....	<b>8</b>	<b>Post Hole Diggers</b> .....	<b>15</b>
Woods grading scrapers are designed to handle more material in fewer passes.		Whatever the soil conditions, count on Woods post hole diggers for tree and shrub planting, deck or fence post installation and many other digging needs.	
<b>Rear Blades</b> .....	<b>10</b>	<b>Quick Hitch</b> .....	<b>16</b>
Grading dirt or driveways, cleaning up construction sites, or moving snow – rely on Woods durable rear blades for maximum performance.		Woods Quick Hitch makes easy work of changing from one three-point attachment to another.	

### Power to be more productive

Whether your landscape projects are contained in your own backyard or the way you make your living, you want equipment that's easy to use, easy to maintain, and built to last. That's what Woods delivers.

We build a full line of tools to tackle a variety of projects that shape, create and maintain your land. We'll help you get the most out of the investment you've made in your tractor. And, at the end of the day, we'll help you feel good about all the chores you checked off your list.

Put it all together and you've got Woods Power — the power to be more productive.

## More than landscaping equipment


**Woods offers more than ground maintenance tools. We offer a broad line of three-point attachments, ensuring you have just the right tool to not only maintain grounds, but to mow green areas and vegetation, and tackle a variety of earthmoving jobs. See our complete line of attachments at [woodsequipment.com](http://woodsequipment.com).**

### **Woods** GENUINE PARTS

Maintain the quality and performance of your Woods equipment with Woods genuine replacement parts, paint, and lubricants. Available from your authorized Woods dealer.

#### **Find a Woods Dealer**

Woods equipment is distributed through a network of authorized dealers. To find your nearest store visit us at [woodsequipment.com](http://woodsequipment.com) or call 800-319-6637.

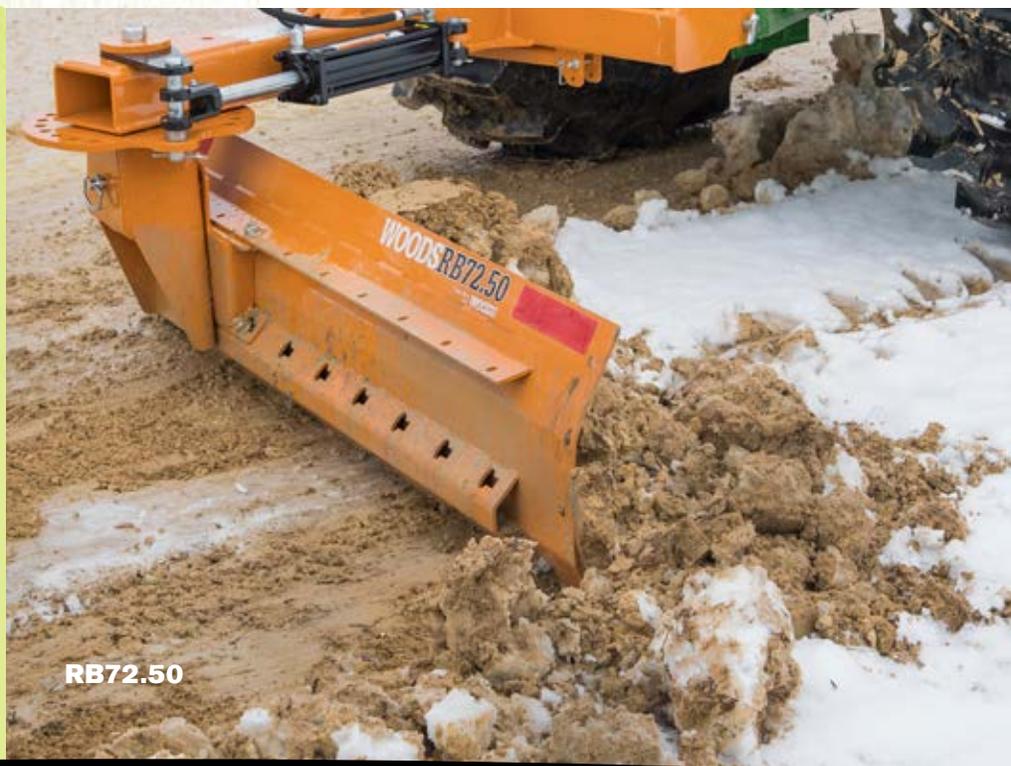

**RB72.50**

# WOODS

## Box Scrapers

Box Scrapers



**BSS72**

Tackle the toughest spreading and grading jobs with Woods® and Gannon® brand box scrapers. From the reinforced steel A-frame to the tough, reversible cutting edge and replaceable scarifiers, our box scrapers deliver exceptional durability and versatility.

- Easily carve into sod and dirt with full-length, high-strength double beveled cutting edges
- Tackle the most rugged jobs with high-strength moldboards
- Choose widths from 48 to 96 inches to suit a variety of jobs
- Ensure faster, easier and safer hook-ups with ASABE Quick-Hitch compatibility

### Tractor HP range: Up to 25 hp

#### Models

**GBC48** 48-inch

- Three-point hitch: CAT 0, Limited 1 and 1
- End Plates: .179-inch
- Half-inch by six-inch reversible beveled cutting edges
- Four adjustable, three-position scarifiers
- Fourteen and one-half-inch moldboard

### Tractor HP range: Up to 45 hp

#### Models

**BSS54** 54-inch  
**BSS60** 60-inch  
**BSS65** 65-inch  
**BSS72** 72-inch

- Three-point hitch: CAT 1
- End plates: .375-inch
- Heavy steel plate A-frame mast
- Reversible/replaceable high-carbon cutting edges



**BSM84**

## Tractor HP range: 40 - 65 hp

### Models

**BSM72** 72-inch

**BSM84** 84-inch


- Three-point hitch: CAT 1 and 2
- The BSM Series offers an optional floating, hinged tailgate to provide maximum down force on the cutting edge
- End plates: .5-inch
- Quarter-inch plate welded inside of end plates to increase life

Specifications	GBC48	BSS54	BSS60	BSS65	BSS72	BSM72	BSM84
<b>Tractor Engine HP</b>	up to 25 hp	up to 45 hp				40–65 hp	
<b>Tractor Hitch</b>	CAT 0, Limited 1 & 1	CAT 1				CAT 1 & 2	
<b>Working Width</b>	48"	54"	60"	65"	72"		84"
<b>Weight</b>	285 lbs	486 lbs	514 lbs	528 lbs	551 lbs	680 lbs	750 lbs
<b>Capacity</b>	6.8 cu ft	10.3 cu ft	11.5 cu ft	12.5 cu ft	13.8 cu ft		16.2 cu ft
<b>End Plate Thickness</b>	0.179"	0.375"				0.5"	
<b>Moldboard Thickness</b>	0.179"	0.188"				0.25"	
<b>Scarifier Depth</b>	0"–1.5"	0", 1.5" or 3" adjustable					
<b>Number of Scarifiers</b>	4	4	5	5	6		7
<b>Tailgate Type</b>	fixed					fixed, floating optional	
<b>Reversible Cutting Edge (Qty/Size)</b>	(2) 0.5" x 6"						
<b>ASABE Quick-Hitch Compatible</b>	yes						

# WOODS

## Industrial Box Scrapers

Industrial Box Scrapers

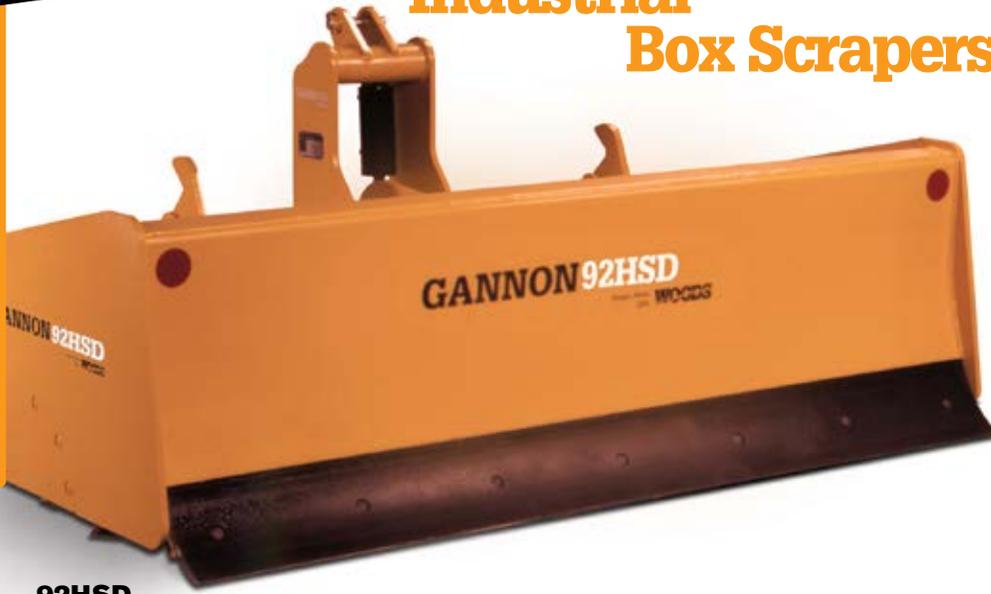

92HSD

Take advantage of the Gannon® name recognized throughout the construction industry as having superior durability, quality and strength.


**Tractor HP range:**  
40 - 100 hp

- Ideal for landscapers, farmers, contractors, and municipalities
- Scarify, level, grade and backfill

Specifications	72HSD	76HSD	80HSD	84HSD	88HSD	92HSD	80HXD	84HXD	88HXD	92HXD	96HXD	
Tractor Engine HP	40-90 hp						40-100 hp					
Tractor Hitch	CAT 2											
Working Width	72"	76"	80"	84"	88"	92"	80"	84"	88"	92"	96"	
Height	24.5"											
Operating Weight	1,230 lbs	1,247 lbs	1,263 lbs	1,280 lbs	1,297 lbs	1,310 lbs	1,236 lbs	1,280 lbs	1,297 lbs	1,310 lbs	1,327 lbs	
Depth	40.188"											
Heaped Capacity	25.7 cu ft	27.0 cu ft	28.6 cu ft	30.0 cu ft	31.6 cu ft	32.9 cu ft	28.6 cu ft	30.0 cu ft	31.6 cu ft	32.9 cu ft	34.3 cu ft	
End Plate Thickness	0.5"											
Replacement End Plate Wear Bits	yes						no					
Reversible Cutting Edge (Qty/Size)	(2) 0.5" x 6"											
Number of Scarifiers	8											
Optional Tailgate	-	-	-	-	-	-	-	-	-	-	-	

### Backfill Moldboard

Available in full height (shown) for maximum strength and capacity, or hinged tailgate for precise grading

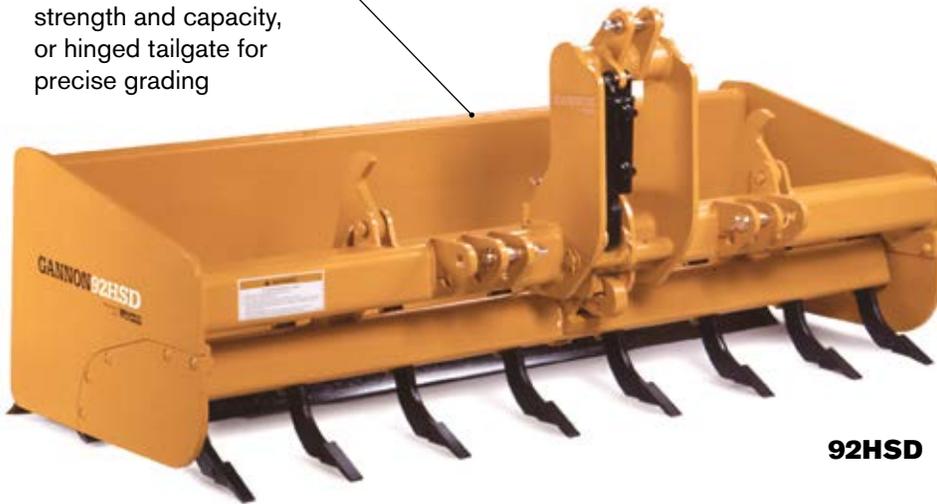

**92HSD**

### Interchangeable and Reversible Cutting Edges

Strong, wear-resistant cutting edges are interchangeable and reversible

## Industrial 4 x 2 and 4 x 4 Series

- Three-point hitch: CAT 1 and 2
- Available in 65- to 96-inch widths
- Large capacity box — no gussets or bars to obstruct material boiling
- Unique “Maxi-load” shape moldboard minimizes tractor drag
- Replaceable, heat-treated scarifier teeth and replaceable side-wear plates available (on some models)
- Reversible/replaceable high-carbon cutting edges

65LB	65HB	72LB	72HB	76LB	76HB	80LB	80HB	84HB
40–80 hp								
CAT 1 & 2								
65"		72"		76"		80"		84"
19.313"	24.5"	19.313"	24.5"	19.313"	24.5"	19.313"	24.5"	
925 lbs	1,020 lbs	1,002 lbs	1,100 lbs	1,040 lbs	1,140 lbs	1,075 lbs	1,170 lbs	1,200 lbs
39.5"								
20.8 cu ft	23.2 cu ft	23.0 cu ft	25.7 cu ft	24.3 cu ft	27.3 cu ft	25.7 cu ft	28.6 cu ft	30.0 cu ft
0.5"								
no								
(2) 0.5" x 6"								
6		8						
yes								

# WOODS

## Grading Scrapers

Grading Scrapers



**GSS72P**

**Ideal for jobs like leveling potholes in gravel driveways or smoothing soil berms after installing field tile.**

- Heavy-duty mast plate creates more down force for smoother surface and virtually eliminates washboard effect
- Adjustable skid shoes and scarifiers increase performance
- Tall side frames hold more material for leveling
- Approachable leading edges and structural reinforcements keep scraper stronger for longer
- Reversible/replaceable high-carbon cutting edges

**Tractor HP range:  
14 - 45 hp**

**Models**

<b>GSS54/GSS54P</b>	53-inch
<b>GSS60/GSS60P</b>	59-inch
<b>GSS72/GSS72P</b>	71-inch

- Three-point hitch: Limited CAT 1 and 1
- Fourteen- and sixteen-inch box height
- Fast, easy and safe hook-ups with ASABE Quick-Hitch compatibility

**Tractor HP range:  
30 - 65 hp**

**Models**

<b>GSM84/GSM84P</b>	83-inch
<b>GSM96/GSM96P</b>	95-inch

- Three-point hitch: CAT 1 and 2
- Sixteen-inch box height — one of the tallest in the industry
- Fast, easy and safe hook-ups with ASABE Quick-Hitch compatibility




**All models available without scarifiers when deep tillage is unnecessary. Grading scrapers without scarifiers have no shank pockets.**

**Heavy Mast Plate**

Solid mast plate provides increased weight for greater down force and constant ground contact

**Reinforced Back**

Reinforcement bar maintains strength and handles heavier material without compromising structure

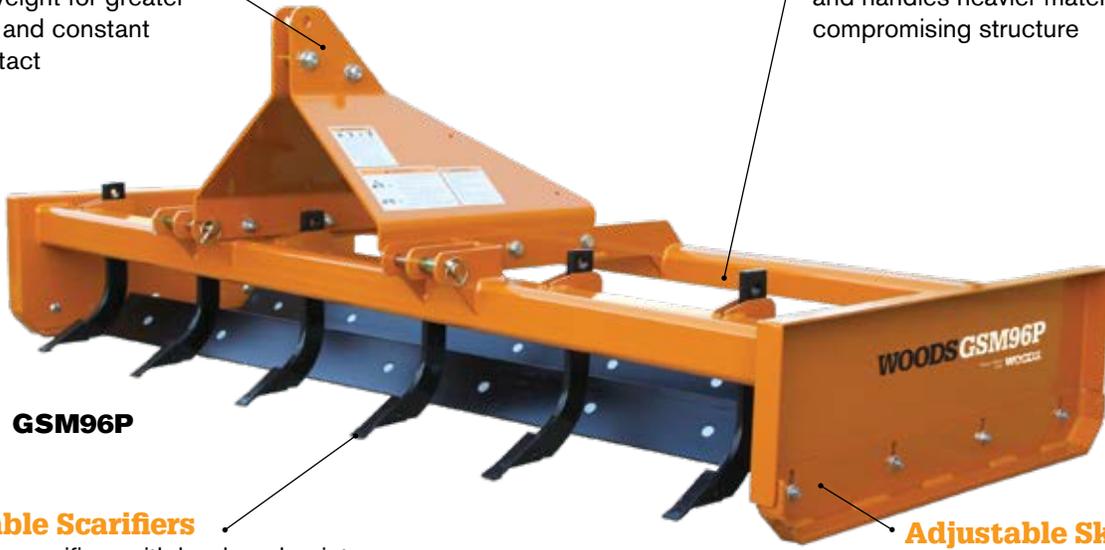

**GSM96P**

**Replaceable Scarifiers**

Replaceable scarifiers with hardened points increases durability and versatility

**Adjustable Skid Shoe**

Replaceable, heavy skids wear longer. Outside adjustment allows for quick changes

Specifications	GSS54/ GSS54P	GSS60/ GSS60P	GSS72/ GSS72P	GSM84/ GSM84P	GSM96/ GSM96P
<b>Tractor Engine HP</b>	15–30 hp	20–45 hp		30–65 hp	
<b>Tractor Hitch</b>	Limited CAT 1 & 1	CAT 1		CAT 1 & 2	
<b>Working Width</b>	53"	59"	71"	83"	95"
<b>Overall Width</b>	58"	64"	76"	88"	100"
<b>Overall Length</b>	42"	46"			
<b>Box Height</b>	14"	16"			
<b>Weight (without scarifiers)</b>	349 lbs	493 lbs	580 lbs	662 lbs	721 lbs
<b>Weight (with scarifiers*)</b>	409 lbs	553 lbs	655 lbs	752 lbs	810 lbs
<b>Number of Scarifiers*</b>	4		5	6	6
<b>Scarifier Adjustments*</b>	-4.0, -2.5, -1.0, +1.0		-2.5, -1.0, +0.5, +2.5		
<b>Reversible Cutting Edge (Qty/Size)</b>	(2) 0.5" x 6"				
<b>Skid Shoe Adjustments</b>	-0.75 to +0.75		-1.0 to +0.5		
<b>Lower Hitch Design</b>	clevis				
<b>ASABE Quick-Hitch Compatible</b>	yes				

\*Premium models only: GSS54P, GSS60P, GSS72P, GSM84P and GSM96P

# WOODS

## Rear Blades

Rear Blades



### RBS84P

Shown with optional parking stand

Ideal for grading dirt or gravel, cleaning up construction sites and moving snow.

**Tractor HP range:**  
**30 - 65 hp**

### 50 - Series Rear Blades

#### Models

<b>RB72.50</b>	71-inch
<b>RB84.50</b>	83-inch
<b>RB96.50</b>	95-inch

- Seventeen-inch high, 1/4-inch thick moldboard
- Double-beveled, reversible, and hardened cutting edge for long life
- Fully manual offers angle, offset, and tilt adjustments
- Optional end plates, skid shoes, and hydraulic angle kit (includes relief valve)
- Convenient parking stand is standard

**Tractor HP range:**  
**Up to 45 hp**

#### Models

<b>RBS54</b>	53-inch
<b>RBS60</b>	59-inch
<b>RBS72</b>	71-inch

#### Models

<b>RBS60P</b>	59-inch
<b>RBS72P</b>	71-inch
<b>RBS84P</b>	83-inch

- Formed moldboard made from high-strength steel provides exceptional rigidity and pivots 360°
- Double-beveled, reversible, bolt-on cutting edge adds to product life and enables easy replacement
- Optional skid shoes for depth control, and optional parking stand for easier attachment



## Tractor HP range: 40 - 85 hp

### 60 - Series Rear Blades

#### Models

<b>RB84.60</b>	83-inch
<b>RB96.60</b>	95-inch

- Seventeen and a half-inch high, 5/16-inch thick moldboard
- Double-beveled, reversible, and hardened cutting edge for long life
- Choose manual or hydraulic, featuring angle, offset, and tilt adjustments
- Optional end plates, skid shoes, tailwheel, and selector valve
- Convenient parking stand is standard

## Tractor HP range: 50 - 100 hp

#### Models

<b>RB750</b>	83-inch
<b>RB850</b>	95-inch

- Three-point hitch: CAT 2
- Seventeen-inch high, reinforced moldboard
- Optional end plates, skid shoes, and tailwheel
- Standard parking stand



**RB72.50**  
Shown with optional hydraulic angle kit.

## Tractor HP range: 80 - 150 hp

#### Models

<b>RB990</b>	107-inch
<b>RB1010</b>	119-inch

- Three-point hitch: CAT 2 and 3
- Fully hydraulic models allow precise blade and material control (angle, tilt, and offset)
- Tough, dozer-type full box construction
- Eighteen-inch high, reinforced mold-board for maximum material loading
- Optional tailwheel
- Standard parking stand

# WOODS

## Rear Blades



**RB96.60**  
Shown with optional hydraulic adjustment and selector valve

Rear Blades

Specifications	RBS54	RBS60	RBS72	RBS60P	RBS72P	RBS84P	RB72.50	RB84.50	RB96.50
<b>Tractor Engine HP</b>	up to 30 hp			20-45 hp			30-65 hp		
<b>Tractor Hitch</b>	Limited CAT 1 & 1			CAT 1			CAT 1 & 2		
<b>Working Width</b>	53"	59"	71"	59"	71"	83"	71"	83"	95"
<b>Moldboard Height</b>	12"			15"			17"		
<b>Moldboard Thickness</b>	0.182" (grade 80 steel)			0.125" (grade 80 steel)			0.25" (grade 80 steel)		
<b>Weight</b>	134 lbs	142 lbs	156 lbs	268 lbs	288 lbs	308 lbs	455 lbs	475 lbs	495 lbs
<b>Double-beveled, Reversible Cutting Edge Dimensions</b>	0.375" x 6"			0.5" x 6"			0.5" x 6"		
<b>Angle Adjustments</b>	5 positions up to 30°						7 positions up to 30°		
<b>Offset Adjustments</b>	—	—	—	up to 12" left or right			6", 12", 18" left or right		
<b>Tilt Adjustments</b>	—	—	—	up to 15°			5 positions up to 23°		
<b>End Plates</b>	—	—	—	optional			optional		
<b>Skid Shoes</b>	optional						optional		
<b>Tailwheel</b>	—	—	—	—	—	—	—		
<b>Parking Stand</b>	optional						standard		
<b>ASABE Quick-Hitch Compatible</b>	yes						yes		



**RB1010**  
Shown with optional tailwheel

RB84.60		RB96.60		RB750		RB850		RB990		RB1010	
40-85 hp				50-100 hp				80-150 hp			
CAT 1 & 2				CAT 2				CAT 2 & 3			
83"		95"		83"		95"		107"		119"	
17.5"				17"				18"			
0.313" (grade 80 steel)				0.313"				0.25"			
705 lbs		730 lbs		1,193 lbs		1,233 lbs		1,483 lbs		1,535 lbs	
0.5" x 6"				0.5" x 6"							
45° (mech or hyd)				9 forward up to 60°; 5 reverse up to 30° (mech or hyd)				up to 60° (hyd)			
up to 20" (mech or hyd)				up to 24" (mech or hyd)				up to 33" (mech or hyd)			
up to 23° (mech or hyd)				up to 30° (mech or hyd)				up to 28° (mech or hyd)			
optional				optional				—		—	
optional				optional				—		—	
optional				optional							
standard				standard							
yes				yes							

# WOODS

## Landscape Rakes

Woods landscape rakes are built with rugged durability for tough clean-up jobs, as well as fine raking features for light-duty lawn care and general maintenance.

**Tractor HP range:  
Up to 45 hp**

**Models**

**LRS52** 52-inch  
**LRS60** 60-inch  
**LRS72** 72-inch

**Models**

**LRS72P** 72-inch  
**LRS84P** 84-inch  
**LRS96P** 96-inch

- Heavy pivot components increase product longevity
- High-strength, box-type tine beam channel holds alloy spring steel tines firmly
- Fast, easy and safe hook-ups with ASABE Quick-Hitch compatibility
- Optional gauge wheels allow better depth control and optional parking stand for easier attachment



Landscape Rakes

LRS72

Specifications	LRS52	LRS60	LRS72	LRS72P	LRS84P	LRS96P
<b>Tractor Engine HP</b>	up to 30 hp			20–45 hp		
<b>Tractor Hitch</b>	Limited CAT 1 & CAT 1			CAT 1		
<b>Working Width</b>	52"	60"	72"	72"	84"	96"
<b>Weight</b>	156 lbs	168 lbs	186 lbs	264 lbs	288 lbs	311 lbs
<b>Pivot Angle</b>	5 positions up to 30°					
<b>Tine Dimensions</b>	5/16" x 1"					
<b>Tine Spacing</b>	1"					
<b>ASABE Quick-Hitch Compatible</b>	yes					
<b>Parking Stand</b>	optional					
<b>Options</b>	parking stand, gauge wheels					

# Post Hole Diggers



**Standard positioning handle**

Easy one person operation

**6-year gearbox warranty**

Rugged gearbox with tapered roller bearings protects from debris

**Wide range of auger bits**

Offers the best tool for every application

**Ductile iron point and forged steel teeth**

Dig efficiently time after time

**Tractor HP range:**  
35 - 95 hp

**Model**  
TPD95

- Standard shear pin protected shaft extends service life
- Options include parking stand, auger extension, semi-double and double flight augers, and hydraulic down force kit

**Tractor HP range:**  
14 - 35 hp

**Models**  
TPD25  
TPD35

**Tractor HP range:**  
25 - 65 hp

**Model**  
TPD65

Specifications	TPD25	TPD35	TPD65	TPD95
<b>Tractor PTO HP Range</b>	14–25 hp	20–35 hp	25–65 hp	35–95 hp
<b>Tractor Hitch</b>	CAT 0, Limited 1, & 1	CAT 1	CAT 1 & 2	
<b>Approximate Weight (without auger)</b>	140 lbs	146 lbs	194 lbs	238 lbs
<b>Drive Type</b>	gearbox			
<b>Tractor PTO Speed</b>	540 rpm			
<b>Shear Pin</b>	standard			
<b>Positioning Handle</b>	standard			
<b>Hydraulic Downforce Kit</b>	optional			
<b>Parking Stand</b>	optional			
<b>Auger (Diameter x Length)</b>	6", 9", 12" x 36"	6", 9", 12", 18" x 48"	6", 9", 12", 18", 24", 30" x 48"	
<b>Auger Extension</b>	optional (12")			



## Quick Hitch

Woods TQH1 quick hitch makes easy work of changing from one 3-point attachment to another. When hooking up to many implements, you never have to leave the tractor because lower hooks automatically lock implement into place.

Specifications	TQH1
<b>Tractor Hitch</b>	CAT 1
<b>Width</b>	27.25"
<b>Weight</b>	75 lbs
<b>Mounting Pin Diameter</b>	0.875"
<b>Adapter Bushing Diameter</b>	1.44"

- Heavy-duty steel construction with adjustable top link bracket
- Seven-eighths - inch mounting pins and adapter bushings
- Lower arms lock automatically
- Ensure faster, easier and safer hook-ups with ASABE quick-hitch compatibility

**POWER TEAM** **Got ideas?**  
Join our customer panel at [woodsequipment.com/power](http://woodsequipment.com/power).  
**You have the power...**

**WOODS®** | A Blount International Brand  
2606 South Illinois Route 2, Oregon, Illinois 61061 tel 800-319-6637 [woodsequipment.com](http://woodsequipment.com)



Warning! Some images may show safety shields removed to provide a better view. Equipment should never be operated with any safety shield removed. Some machines in this brochure may be shown with optional equipment. Always operate machines in accordance with supplied operator's manuals. ©2018 Woods Equipment Company. All rights reserved. WOODS, and the Woods logo are trademarks of Woods Equipment Company. All other trademarks, trade names, or service marks not owned by Woods Equipment Company that appear in this brochure are the property of their respective companies or mark holders. Specifications subject to change without notice.