


# **WOODS**

woodsequipment.com.au

## **FINISHING MOWERS**

**QUALITY MACHINES  
BUILT FOR EFFICIENCY  
AND DURABILITY**

**WORKING HARD FOR GENERATIONS**

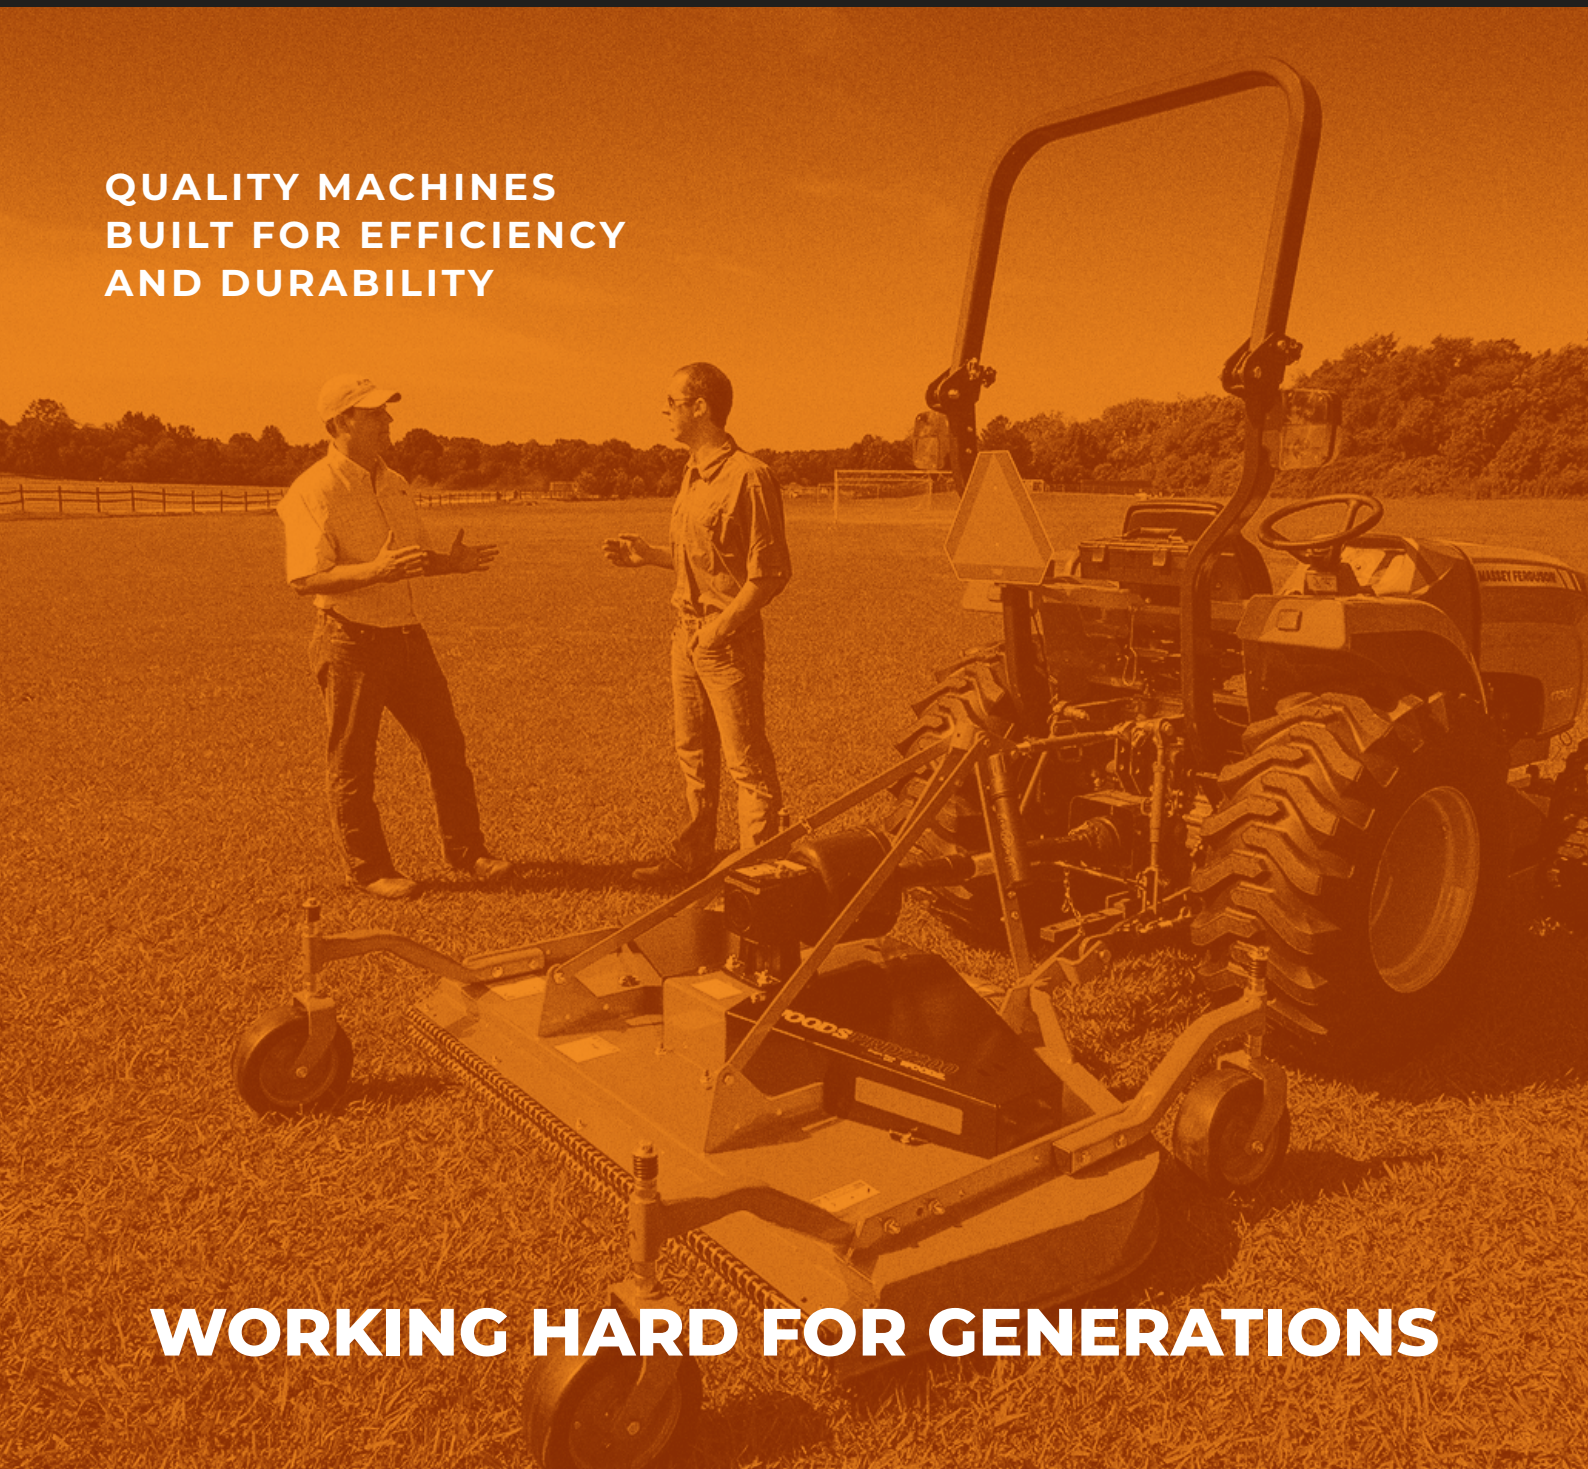





# FINISHING MOWERS

## Table of Contents

<b>Time To Get Even.....</b>	<b>2</b>
<b>Finishing Mowers Features &amp; Benefits.....</b>	<b>3</b>
<b>Standard Duty Finishing Mower Series.....</b>	<b>5</b>
TK60.20W	
TK72.20W	
<b>Specifications Table.....</b>	<b>6</b>
<b>Heavy Duty Finishing Mower Series.....</b>	<b>7</b>
TKP60.40W	
TKP72.40W	
TKP84.40W	
<b>Specifications Table.....</b>	<b>8</b>
<b>Extra Heavy Duty Finishing Mower Series.....</b>	<b>9</b>
RD990XW	
<b>Specifications Table.....</b>	<b>9</b>
<b>Standard Duty Flex Wing Finishing Mower Series...10</b>	
TBW12.20W	
<b>Specifications Table.....</b>	<b>10</b>
<b>Heavy Duty Flex Wing Finishing Mower Series.....</b>	<b>11</b>
TBW12.40W	
TBW15.40W	
TBW17.40W	
<b>Specifications Table.....</b>	<b>12</b>
<b>Quick Reference Specifications Tables.....</b>	<b>13</b>



Since 1946 Woods have been manufacturing Woods Equipment in Oregon, Illinois. Woods are American made with American steel - quality machines built to last.

### Woods in Australia

TISCA (Tractor Implement Supply Company of Australia Pty Ltd) have been importing Woods equipment for over 15 years. TISCA also manufactures side throw options for all Woods slashers in Australia.

### Find a Woods Dealer

Woods Equipment is distributed through a network of authorised dealers. To find your nearest dealer visit us at [woodsequipment.com.au](http://woodsequipment.com.au) or call (07) 5441 5677

# TIME TO GET EVEN

**EVEN CUT. EVEN DISTRIBUTION. EVEN COSTS LESS TO OWN.**

**TURFKEEPER™**



**TK60.20W**

## Driveline Holder

Keep the drive out of the dirt, even when attaching.



## 6-year Gearbox Warranty

Confidence in the durability of your Woods mower.



## 3-year Spindle Warranty

Lubed for life spindles with three-year warranty provide ease of mind.

**TURFKEEPER PRO™**

## Ease of Attachment

Quick-hitch ready from the factory for ease of attachment.

## Durability

Premium, solid rubber caster wheels for performance and durability.



**TK72.40W**

## Tapered Roller Bearings

Tapered roller bearings in caster wheels provide superior performance and longevity in rough conditions.



## 10-year Gearbox Warranty

With twice the oil capacity of many competitors and an improved breather system that maintains oil lubrication of gears, RD990X gearboxes carry a 10-year limited warranty to ensure years of worry-free performance.

## Replaceable Side Skids

Replaceable side skids attach to heavy side frames for durability and long life.



**RD990XW**



# So... Why Woods?

Introducing the new rear-mount finishing mowers from Woods, the TurfKeeper, designed to deliver outstanding cut quality at a lower cost of ownership. The TurfKeeper Pro, our new, premium, rear-mount finishing mowers designed with maximum durability for commercial and residential applications, and the newly redesigned TurfBatwing, our triple-deck, rear-discharge, flex wing finishing mower for large lawns and estates.



## 6 - 10 year Gearbox Warranty

Confidence in the durability of your Woods mower.



## Automatic Belt Tensioner

No spanners or time required to maintain correct tension.



## Chain Shielding

Helps prevent discharge of foreign objects.




## Easy Shield Removal

No tools needed to access belt sheaves, belt, spring-loaded idler.



## Cast Iron Sheaves

Better belt grip for extended belt life.

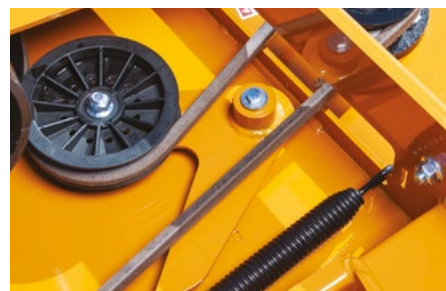

## Serviceable Belt Idler

Replaceable idler post and bronze bushing.



## Driveline Holder

Keep the drive out of the dirt, even when attaching.



## Optional Front Roller

Anti-scalp protection for uneven terrain.



## 3-year Spindle Warranty

Lubed for life spindles with one year warranty provide ease of mind.





**TIME TO  
GET EVEN**

**EVEN CUT.  
EVEN DISTRIBUTION.  
EVEN COSTS LESS TO OWN.**

**IT'S TIME TO GET EVEN  
WITH YOUR GRASS  
LIKE A PRO!**

# 20 Series

## Standard Duty Finishing Mowers

The TurfKeeper Standard-Duty Finishing Mowers are designed for tractors up to 35hp PTO with a cutting width from 1.5m (5') to 1.83m (6'). The Standard-Duty finishing mower is ideal for mowing grass on a compact tractor in domestic and commercial applications.



- High-lift blades for best in class lifting and cutting of green material for evenness of cut
- Parallel frame deck sides spread material from edge to edge for even material distribution
- High blade tip speeds enhance productivity with improved mowing at higher speeds for less time on the job
- Hitch: Limited CAT 1 (TK60.20W) and CAT 1 (TK60.20W & TK72.20W)

**Tractor PTO HP Range:**

**15 - 35hp**

**Models**

**TK60.20W | 1.5m (5')**

**TK72.20W | 1.83m (6')**

**WORKING FOR  
GENERATIONS  
TO COME!**

SPECIFICATIONS			20 SERIES STANDARD DUTY FINISHING MOWERS	
MODEL	TK60.20W		TK72.20W	
Tractor PTO Horsepower	15hp - 35hp		20hp - 35hp	
Gearbox Horsepower	35hp			
Cutting Width	1.5m (5')		1.8m (6')	
Cutting Height Range	35mm - 125mm			
Shielding	Chain Shielding			
Weight	264kg		289kg	
Transport Width	1.55m (5.1')		1.85m (6.1')	
Deck Thickness	4.1mm			
Side Skirt	4.1mm x 117mm Deep			
Hitch / Quick Hitch Compatible	Cat 1 / Yes			
Tip Speed	17,900fpm		18,000fpm	
Blade Overlap	38mm			
Blade Spindles / Bearings	3 cast iron housing / greaseable ball bearings			
Blade Sheave	Steel			
Blade Crossbar	-			
Caster Wheels	3.25 x 10 solid rubber			
Tractor PTO Speeds	540rpm			
Driveline Size	Cat 3			
Belt	'B' size Kevlar V-Belt with automatic belt tension			
Belt Adjustment	Spring Loaded Idler			
Mower Warranty	1 year			
Gearbox Warranty	6 year Limited			
Spindle Warranty	3 year Limited			



# 40 Series

## Heavy Duty Finishing Mowers

The TurfKeeper Pro Heavy-Duty Finishing Mowers are designed for tractors up to 60hp PTO with a cutting width from 1.5m (5') to 2.1m (7'). The Heavy-Duty finishing mower is ideal for commercial applications including vineyards, contractors, councils and orchards.



- Heavy duty construction provides maximum durability
- Strong, 7 gauge steel deck and a powerful 60hp gearbox
- Uniquely designed for best-in-class cut quality
- Floating lower hitch helps to follow ground contours for a smooth, even cut
- Easy cover removal - no tools needed to access belt pulleys & idlers
- Deep deck and high blade tip speeds help you get the job done faster
- Optional chain shielding attaches and detaches easily
- Ideal for mowing large lawns, sports fields and parks
- Superior baffle design distributes material more evenly

**Tractor PTO HP Range:**

**15 - 50hp**

**Models**

**TKP60.40W | 1.5m (5')**

**TKP72.40W | 1.83m (6')**

**TKP84.40W | 2.1m (7')**

**TURFKEEPER PRO DELIVERS BEST-IN-CLASS CUT  
QUALITY AT A LOWER COST OF OWNERSHIP.  
IT'S TIME TO GET EVEN WITH YOUR GRASS  
LIKE A PRO!**



SPECIFICATIONS				40 SERIES HEAVY DUTY FINISHING MOWERS			
MODEL	TKP60.40W		TKP72.40W		TKP84.40W		
Tractor PTO Horsepower	15hp - 50hp		20hp - 50hp		25hp - 50hp		
Gearbox Horsepower	60hp						
Cutting Width	1.5m (5')		1.8m (6')		2.1m (7')		
Cutting Height Range	25mm - 140mm						
Shielding	Chain Shielding						
Weight	330kg		364kg		420kg		
Transport Width	1.55m (5.1')		1.85m (6.1')		2.2m (7.2')		
Deck Thickness	4.1mm						
Side Skirt	4.1mm x 136mm with 140mm diameter skid rod bumper						
Hitch / Quick Hitch Compatible	Cat 1 / Yes						
Tip Speed	18,000fpm		18,100fpm		18,100fpm		
Blade Overlap	38mm						
Blade Spindles / Bearings	3 cast iron housing / greaseable ball bearings						
Blade Sheave	Cast iron with taper lock bushing						
Blade Crossbar	Yes						
Caster Wheels	100mm x 250mm						
Tractor PTO Speeds	540rpm						
Driveline Size	Cat 3						
Belt	'B' size Kevlar V-Belt with automatic belt tension						
Belt Adjustment	Spring Loaded Idler						
Mower Warranty	2 year						
Gearbox Warranty	10 year Limited						
Spindle Warranty	3 year Limited						

# RD990XW

## Extra Heavy Duty Finishing Mower

The Woods RD990XW Finishing Mower is an Extra Heavy-Duty mower with a 2.3m (8') cutting width and a 75hp gearbox, designed and manufactured for extreme usage and the most demanding applications. The Woods RD990X rear discharge finishing mower is tough yet versatile enough to move from rough, weedy farmland to commercial lawns and landscape applications.



### Tractor PTO HP Range: **45 - 75hp**

- Three - point hitch: CAT 1 and 2.
- Takes down grass and light weeds, and leaves a high grade finish cut behind.
- Features a patented Quick-change blade system, an extra strong double B - section belt, and anti - wrap bars that prevent damage caused by material wrapped around lower spindle.
- Deep deck and stump jumper blade carrier with free-swinging blades ideal for rough grass.
- Floating lower hitch points allow the mower to follow uneven terrain.
- Chain shielding standard.

SPECIFICATIONS	EXTRA HEAVY DUTY FINISHING MOWER
MODEL	RD990XW
Tractor PTO Horsepower	45hp - 75hp
Gearbox Horsepower	75hp
Cutting Width	2.3m (8')
Cutting Height Range	38mm
Weight	605kg
Transport Width	2.46m
Deck Material Thickness	7 Gauge
Side Skirt	8mm Thick x 18.25mm
Blade Tip Speed	17,000fpm
Blade Overlap	50mm
Blade Spindles / Bearings	3 cast iron housing / greaseable ball bearings
Blade Sheave	Cast iron with taper lock bushing
Blade Crossbar	Yes, Free Swinging Blades
Caster Wheels	125mm x 330mm
Tractor PTO Speed	540rpm
Driveline Size	Cat 4
Hitch / Quick Hitch Compatible	Cat 1 & 2 / Yes
Belt / Belt Adjustment	Powerband with double B - Section Kevlar / Spring Loaded Idler
Front Centre Roller / Front Anti-Scalp Roller	Optional
Shielding	Chain Shielding
Mulching Kit	-
Mower Warranty	2 year
Gearbox Warranty	10 year Limited
Spindle Warranty	3 year Limited



# Wide Area Estate TurfBatwing

## Standard Duty Flex Wing Finishing Mower

The Woods Standard-Duty TurfBatwing TBW12.20W is a triple-deck, rear-discharge, flexing finishing mower for large lawns and estates. The Woods Standard-Duty TurfBatwing TBW12.20W suits tractor with up to 60hp tractor PTO horsepower.



Tractor PTO HP Range:

## 25 - 60hp

Models

**TBW12.20W | 3.8m (12.5')**

- High-lift blades for best-in-class lifting and cutting of green material for evenness of cut.
- Parallel deck side frames spread material from edge to edge for even material distribution.
- High blade tip speeds enhance productivity with improved mowing at higher speeds for less time on the job.
- Trust the Woods legacy for durable, high-quality cutting equipment for all your mowing needs.

SPECIFICATIONS	WIDE AREA ESTATE TURFBATWING
MODEL	TBW12.20W
Tractor PTO Horsepower	25hp - 60hp
Gearbox Horsepower	100hp Splitter / 35hp Mower Deck
Cutting Width	3.8m (12.5')
Cutting Height Range	25mm - 115mm
Cutting Height Adjustment	Spacer on caster
Shielding	Chain Shielding
Weight	968kg
Wing Deck Cutting Width	1.37m (4.5')
Deck Overlap	15cm (5.9")
Deck Thickness	3.2mm steel plate
Overall Width	3.83m (12.5')
Transport Width	2.36m (7.7')
Maximum Overall Length	3.43m (12.5')
Transport Length	3.2m (10.5')
Hitch	Floating Clevis, Multi-Position
Angle Operating Range	20° up / 15° down
Blade Tip Speed	16,200fpm
Blade Spindle Bearings	Greaseable ball bearings
Blade Dimensions	6mm x 63.5mm (0.25" x 2.5")
Blade Spindles	Cast Iron
Drive Type	Gearbox over V-Belt
Input Driveline / Wing Driveline	Cat 3 CV (Constant Velocity) / Cat 3
Tyres	20.5 x 9 non-highway speed rated transport tyres
Caster Wheels	10 x 4 solid rubber gauge wheels
Caster Wheel Bearings	Power metal bushing
Wing Deck Lift Cylinders	7.6cm x 25.4cm (3" x 10") Single Acting
Centre Deck Lift Cylinders	8.9cm x 20.3cm (3" x 8") Single Acting
Trailer Frame Construction	6mm (0.25") Wall Tubing
Belts	B - Section Kevlar
Belt Adjustment	Spring-loaded idler
Mower Warranty	1 year
Gearbox Warranty	6 year Limited
Spindle Warranty	1 year Limited

# Commercial TurfBatwing

## Heavy Duty Flex Wing Finishing Mower

The Woods Commercial Turf Batwing Finishing Mower is a Heavy-Duty model of the Woods TurfBatwing Finishing Mower range. With cutting widths from 3.6m (12') to 5.1m (17'), the Commercial TurfBatwing Finishing Mowers are designed for tractors with a PTO hp range from 35hp – 100hp.



- Angle operating range 25° up and 22° down
- 25mm - 125mm cutting height range
- Blade tip speed of 18,000fpm
- 10 large castor wheels provide even cut on rough ground
- Decks are designed with “box” construction which adds structural depth
- Three decks mounted to heavy-duty trailer for triple cut capacity
- Folded transport width of 2.44m
- 10 year limited gearbox warranty, 3 year limited spindle warranty

**Tractor PTO HP Range:**

**35 - 100hp**

**Models**

**TBW12.40W | 3.6m (12')**

**TBW15.40W | 4.5m (15')**

**TBW17.40W | 5.1m (17')**

**WOODS COMMERCIAL TURF BATWING  
FINISHING MOWERS ARE DESIGNED FOR  
OUTSTANDING CUT QUALITY AND BUILT  
FOR A LONG, DURABLE LIFE.**



SPECIFICATIONS	COMMERCIAL REAR DISCHARGE TURFBATWING		
MODEL	TBW12.40W	TBW15.40W	TBW17.40W
Tractor PTO Horsepower	35hp - 90hp	40hp - 100hp	50hp - 100hp
Gearbox Horsepower	100hp Splitter / 75hp Mower Deck		
Cutting Width	3.6m (12')	4.5m (15')	5.1m (17')
Cutting Height Range	25mm - 125mm		
Cutting Height Adjustment	Spacer on caster		
Shielding	Chain Shielding		
Weight	1,361kg	1,508kg	1,588kg
Wing Deck Cutting Width	1.23m (4')	1.52m (5')	1.83m (6')
Deck Overlap	16.5cm (6.5")	15cm (5.9")	
Deck Thickness	4.1mm		
Overall Width	3.71m (12.2')	4.62m (15.1')	5.23m (17.1')
Transport Width		2.54m (8.3')	2.9m (9.5')
Maximum Overall Length	4.39m (14.4')	4.65m (15.2')	
Transport Length	4.01m (13.1')	4.09m (13.4')	
Hitch	Floating Clevis, Multi-Position		
Angle Operating Range	25° up / 22° down		
Blade Tip Speed	18,000fpm		
Blade Spindle Bearings	Greaseable tapered roller		
Blade Dimensions	6mm x 63.5mm (0.25" x 2.5")		
Blade Spindles	Cast Iron		
Drive Type	Gearbox over V-Belt		
Input Driveline / Wing Driveline	Cat 4 CV (Constant Velocity) / Cat 3		
Tyres	20.5 x 8 load range "D" highway service transport tyres		
Caster Wheels	15 x 6-6 pneumatic gauge wheels	18 x 9.5-8 pneumatic gauge wheels	
Caster Wheel Bearings	Tapered roller bearings		
Wing Deck Lift Cylinders	8.9cm x 25.4cm (3.5" x 10") Single Acting		
Centre Deck Lift Cylinders	8.9cm x 20.3cm (3" x 8") Single Acting		
Trailer Frame Construction	6mm (0.25") Wall Tubing		
Belts	B - Section Kevlar		
Belt Adjustment	Spring-loaded idler		
Mower Warranty	2 year		
Gearbox Warranty	10 year Limited		
Spindle Warranty	3 year Limited		

SPECIFICATIONS		FINISHING MOWER SERIES				
MODEL	TK60.20W	TK72.20W	TKP60.40W	TKP72.40W	TKP84.40W	RD990XW
Tractor PTO Horsepower	15hp - 35hp	20hp - 35hp	15hp - 50hp	20hp - 50hp	25hp - 50hp	45hp - 75hp
Gearbox Horsepower	35hp		60hp			75hp
Cutting Width	1.5m (5')	1.8m (6')	1.5m (5')	1.8m (6')	2.1m (7')	2.3m (7.5')
Cutting Height Range	35mm - 125mm		35mm - 120mm			38mm
Shielding	Chain Shielding					
Weight	264kg	289kg	330kg	364kg	420kg	605kg
Transport Width	1.55m (5.1')	1.85m (6.1')	1.55m (5.1')	1.85m (6.1')	2.2m (7.2')	2.46 (8.1')
Deck Thickness	4.1mm					4.5mm
Side Skirt	4.1mm x 117mm Deep		4.1mm x 136mm with 140mm diameter skid rod bumper			8mm thick x 18.25mm
Hitch / Quick Hitch Compatible	Cat 1 / Yes					Cat 1 & 2 / Yes
Tip Speed	17,900fpm	18,000fpm	18,000fpm	18,100fpm	18,100fpm	17,000fpm
Blade Overlap	38mm					50mm
Blade Spindles / Bearings	3 cast iron housing / greaseable ball bearings					
Blade Sheave	Steel		Cast iron with taper lock bushing			
Blade Crossbar	-		Yes			Yes, Free Swinging Blades
Caster Wheels	3.25 x 10 solid rubber		100mm x 250mm			125mm x 330mm
Tractor PTO Speeds	540rpm					
Driveline Size	Cat 3					Cat 4
Belt	'B' size Kevlar V-Belt with automatic belt tension					'B' size Kevlar V-Belt with automatic tension adjustment
Belt Adjustment	Spring Loaded Idler					
Mower Warranty	1 year		2 year			
Gearbox Warranty	6 year Limited		10 year Limited			
Spindle Warranty	3 year Limited					
Options						Front Centre Roller / Front Anti-Scalp Roller



SPECIFICATIONS					TURFBATWING FINISHING MOWER SERIES				
MODEL		TBW12.20W		TBW12.40W		TBW15.40W		TBW17.40W	
Tractor PTO Horsepower		25hp - 60hp		35hp - 90hp		40hp - 100hp		50hp - 100hp	
Gearbox Horsepower		100hp Splitter / 35hp Mower Deck		100hp Splitter / 75hp Mower Deck					
Cutting Width		3.8m (12.5')		3.6m (12')		4.5m (15')		5.1m (17')	
Cutting Height Range		25mm - 115mm		25mm - 125mm					
Cutting Height Adjustment		Spacer on caster							
Shielding		Chain Shielding							
Weight		968kg		1,361kg		1,508kg		1,588kg	
Wing Deck Cutting Width		1.37m (4.5')		1.23m (4')		1.52m (5')		1.83m (6')	
Deck Overlap		15cm (5.9")		16.5cm (6.5")		15cm (5.9")			
Deck Thickness		3.2mm steel plate		4.1mm					
Overall Width		3.83m (12.5')		3.71m (12.2')		4.62m (15.1')		5.23m (17.1')	
Transport Width		2.36m (7.7')				2.54m (8.3')		2.9m (9.5')	
Maximum Overall Length		3.43m (12.5')		4.39m (14.4')		4.65m (15.2')			
Transport Length		3.2m (10.5')		4.01m (13.1')		4.09m (13.4')			
Hitch		Floating Clevis, Multi-Position							
Angle Operating Range		20° up / 15° down		25° up / 22° down					
Blade Tip Speed		16,200fpm		18,000fpm					
Blade Spindle Bearings		Greaseable ball bearings		Greaseable tapered roller					
Blade Dimensions		6mm x 63.5mm (0.25" x 2.5")							
Blade Spindles		Cast Iron							
Drive Type		Gearbox over V-Belt							
Input Driveline / Wing Driveline		Cat 3 CV (Constant Velocity) / Cat 3		Cat 4 CV (Constant Velocity) / Cat 3					
Tyres		20.5 x 9 non-highway speed rated transport tyres		20.5 x 8 load range "D" highway service transport tyres					
Caster Wheels		10 x 4 solid rubber gauge wheels		15 x 6-6 pneumatic gauge wheels		18 x 9.5-8 pneumatic gauge wheels			
Caster Wheel Bearings		Power metal bushing		Tapered roller bearings					
Wing Deck Lift Cylinders		7.6cm x 25.4cm (3" x 10") Single Acting		8.9cm x 25.4cm (3.5" x 10") Single Acting					
Centre Deck Lift Cylinders		8.9cm x 20.3cm (3" x 8") Single Acting							
Trailer Frame Construction		6mm (0.25") Wall Tubing							
Belts		B - Section Kevlar							
Belt Adjustment		Spring-loaded idler							
Mower Warranty		1 year		2 year					
Gearbox Warranty		6 year Limited		10 year Limited					
Spindle Warranty		1 year Limited		3 year Limited					



1137 Nambour Connection Rd, Parklands QLD 4560

(07) 5441 5677

[woodsequipment.com.au](http://woodsequipment.com.au)  
[tisca.com.au](http://tisca.com.au)

**WOODS**

Warning! Some images may show safety shields removed to provide a better view. Equipment should never be operated with any safety shield removed. Some machines in this brochure may be shown with optional equipment. Always operate machines in accordance with supplied operator's manuals. ©2024 Woods Equipment Company. All rights reserved. WOODS and Woods logo are trademarks of Woods Equipment Company. All other trademarks, trade names, or service marks not owned by Woods Equipment Company that appear in this brochure are the property of their respective companies or mark holders. Specifications subject to change without notice.